

57 mm Blocks

About Carbo Air blocks: see feature page at beginning of this section.




2602



2600

2601

2603

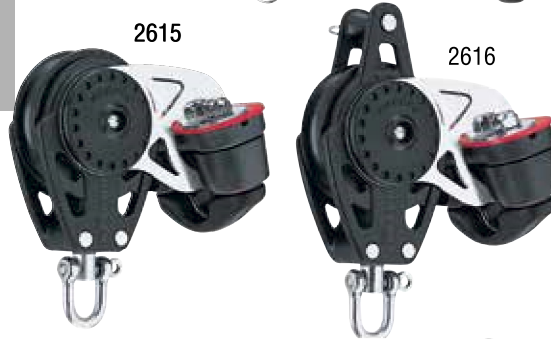

2615

2616



2606



2631




2604

2605

2617

2618

2762

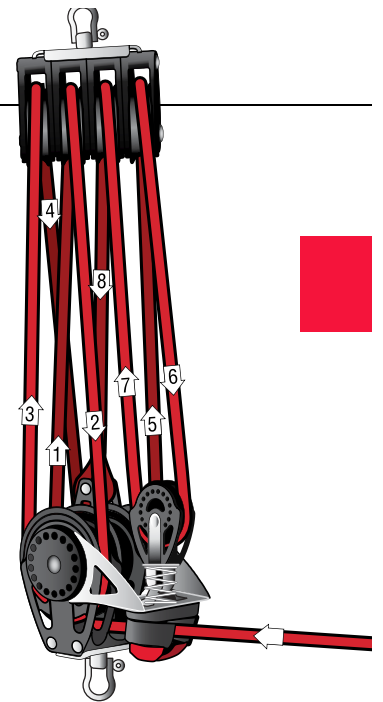

Use with 2632 for a powerful 8:1 purchase.

| Part No. | Description | Sheave Ø | | Length | | Weight w/shackle | | Shackle pin Ø | | Max line Ø | | Maximum working load | | Breaking load | |
|----------|-------------------------------------|----------|----|--------|-----|------------------|-----|---------------|----|------------|----|----------------------|------|---------------|------|
| | | in | mm | in | mm | oz | g | in | mm | in | mm | lb | kg | lb | kg |
| 2600 | Single/swivel | 2 1/4 | 57 | 4 7/16 | 110 | 3.1 | 87 | 3/16 | 5 | 3/8 | 10 | 792 | 359 | 2380 | 1079 |
| 2601 | Single/swivel/becket | 2 1/4 | 57 | 5 1/16 | 132 | 3.4 | 96 | 3/16 | 5 | 3/8 | 10 | 792 | 359 | 2380 | 1079 |
| 2602 | Double/swivel | 2 1/4 | 57 | 4 3/4 | 121 | 6.3 | 178 | — | 6 | 3/8 | 10 | 1584 | 720 | 3300 | 1500 |
| 2603 | Double/swivel/becket | 2 1/4 | 57 | 5 5/8 | 142 | 6.6 | 187 | — | 6 | 3/8 | 10 | 1584 | 720 | 3300 | 1500 |
| 2604 | Triple/swivel | 2 1/4 | 57 | 4 3/4 | 121 | 9 | 255 | — | 6 | 3/8 | 10 | 2380 | 1080 | 5000 | 2270 |
| 2605 | Triple/swivel/becket | 2 1/4 | 57 | 5 5/8 | 142 | 9.3 | 264 | — | 6 | 3/8 | 10 | 2380 | 1080 | 5000 | 2270 |
| 2606 | Cheek | 2 1/4 | 57 | 3 3/8 | 92 | 2.4 | 68 | — | — | 3/8 | 10 | 792 | 359 | 2380 | 1079 |
| 2615 | Single/swivel/150 Cam-Matic* | 2 1/4 | 57 | 4 7/16 | 110 | 9.5 | 269 | 3/16 | 5 | 3/8 | 10 | 300 | 136 | 750 | 340 |
| 2616 | Single/swivel/150 Cam-Matic/becket* | 2 1/4 | 57 | 5 1/16 | 132 | 15.6 | 442 | 3/16 | 5 | 3/8 | 10 | 600 | 272 | 1500 | 680 |
| 2617 | Triple/swivel/150 Cam-Matic* | 2 1/4 | 57 | 4 3/4 | 121 | 15.2 | 431 | — | 6 | 3/8 | 10 | 1500 | 680 | 3750 | 1700 |
| 2618 | Triple/swivel/150 Cam-Matic/becket* | 2 1/4 | 57 | 5 5/8 | 142 | 15.6 | 442 | — | 6 | 3/8 | 10 | 1800 | 816 | 4500 | 2040 |
| 2631 | Quadruple/swivel | 2 1/4 | 57 | 4 3/4 | 121 | 12 | 340 | — | 6 | 3/8 | 10 | 2380 | 1080 | 5000 | 2270 |
| 2762 | 5-sheave/swivel | 2 1/4 | 57 | 4 3/4 | 121 | 15.8 | 448 | — | 6 | 3/8 | 10 | 2380 | 1080 | 5000 | 2270 |

*Maximum working loads and breaking loads for blocks based on cam strengths.


75 mm Blocks

About Carbo Air blocks: see feature page at beginning of this section.



2661

Saffier Se 33, 9.60 m, Saffier Yachts, Dean Hennevanger design © Bertel Kollthof

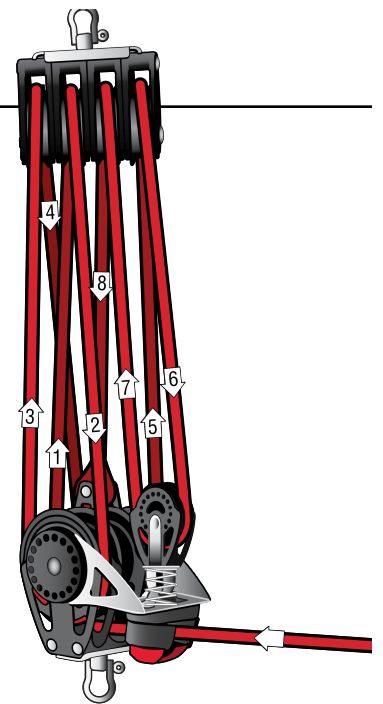

Use with 2687 for a powerful 8:1 purchase.



| Part No. | Description | Sheave Ø | | Length | | Weight w/shackle | | Shackle pin Ø | | Max line Ø | | Maximum working load | | Breaking load | |
|----------|-------------------------------------|---------------------------------|----|-------------------------------|-----|------------------|-----|--------------------------------|----|--------------------------------|----|----------------------|------|---------------|------|
| | | in | mm | in | mm | oz | g | in | mm | in | mm | lb | kg | lb | kg |
| 2660 | Single/swivel | 2 ¹⁵ / ₁₆ | 75 | 5 ³ / ₈ | 137 | 6.9 | 195 | — | 6 | 9 ¹ / ₁₆ | 14 | 1213 | 550 | 3638 | 1650 |
| 2661 | Single/swivel/becket | 2 ¹⁵ / ₁₆ | 75 | 6 ¹ / ₂ | 165 | 7.5 | 214 | — | 6 | 9 ¹ / ₁₆ | 14 | 1213 | 550 | 3638 | 1650 |
| 2662 | Double/swivel | 2 ¹⁵ / ₁₆ | 75 | 6 | 152 | 14.2 | 402 | 5 ⁹ / ₁₆ | 8 | 9 ¹ / ₁₆ | 14 | 2426 | 1100 | 6000 | 2722 |
| 2663 | Double/swivel/becket | 2 ¹⁵ / ₁₆ | 75 | 7 | 178 | 14.8 | 419 | 5 ⁹ / ₁₆ | 8 | 9 ¹ / ₁₆ | 14 | 2426 | 1100 | 6000 | 2722 |
| 2664 | Triple/swivel | 2 ¹⁵ / ₁₆ | 75 | 6 | 152 | 20.5 | 580 | 9 ¹ / ₁₆ | 8 | 9 ¹ / ₁₆ | 14 | 3639 | 1650 | 10000 | 4535 |
| 2665 | Triple/swivel/becket | 2 ¹⁵ / ₁₆ | 75 | 7 | 178 | 21.1 | 599 | 9 ¹ / ₁₆ | 8 | 9 ¹ / ₁₆ | 14 | 3639 | 1650 | 10000 | 4535 |
| 2666 | Single/swivel/150 Cam-Matic* | 2 ¹⁵ / ₁₆ | 75 | 5 ³ / ₈ | 137 | 13.4 | 381 | — | 6 | 1/2 | 12 | 300 | 136 | 750 | 340 |
| 2667 | Single/swivel/150 Cam-Matic/becket* | 2 ¹⁵ / ₁₆ | 75 | 6 ¹ / ₂ | 165 | 14 | 397 | — | 6 | 1/2 | 12 | 600 | 272 | 1500 | 680 |
| 2668 | Triple/swivel/150 Cam-Matic* | 2 ¹⁵ / ₁₆ | 75 | 6 | 152 | 27.8 | 788 | 9 ¹ / ₁₆ | 8 | 1/2 | 12 | 1500 | 680 | 3750 | 1700 |
| 2669 | Triple/swivel/150 Cam-Matic/becket* | 2 ¹⁵ / ₁₆ | 75 | 7 | 178 | 28.4 | 805 | 9 ¹ / ₁₆ | 8 | 1/2 | 12 | 1800 | 816 | 4500 | 2040 |
| 2677 | Quadruple/swivel | 2 ¹⁵ / ₁₆ | 75 | 6 ¹ / ₄ | 159 | 27.2 | 772 | 9 ¹ / ₁₆ | 8 | 9 ¹ / ₁₆ | 14 | 3639 | 1650 | 10000 | 4535 |

*Maximum working loads and breaking loads for blocks based on cam strengths.