

# 57 mm Blocks

About Black Magic Air blocks: see feature pages at beginning of this section.

Elan E4, 10.60 m (34.78'), Rob Humphreys Yacht Design/Elan © Elan



Low-load blocks have red isolators. They use Torton® rollers and 316 stainless steel shackles. Standard blocks have 17-4 PH stainless headposts.




3226  
3215



3214



3216  
3229

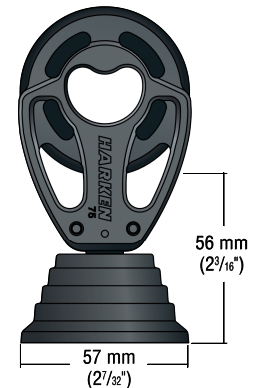

3217  
3228




3218



3219



3227

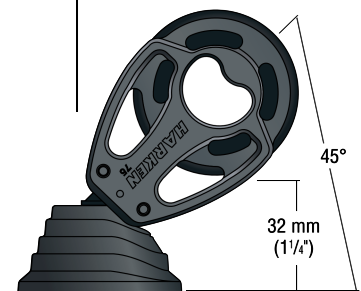

3227

Torton is a registered trademark of Solvay Advanced Polymers, L.L.C.

Part No.	Description	Sheave Ø		Length		Weight		Shackle pin Ø		Max Line Ø		Maximum working load		Breaking load	
		mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg	
3226	Low-load single swivel	57	4 <sup>11</sup> / <sub>16</sub>	119	5.44	154	1/4	6	7/16	12	1655	750	3310	1500	
3229	Single/low-load/becket swivel	57	5 <sup>1</sup> / <sub>2</sub>	140	5.95	169	1/4	6	7/16	12	1655	750	3310	1500	
3228	Double/low-load swivel	57	5 <sup>3</sup> / <sub>16</sub>	132	12.05	342	5/16	8	7/16	12	2755	1250	5510	2500	
3219	Triple swivel	57	5 <sup>3</sup> / <sub>16</sub>	132	13.34	378	5/16	8	7/16	12	4850	2200	9700	4400	
3215	Single swivel	57	4 <sup>11</sup> / <sub>16</sub>	119	5.36	152	1/4	6	7/16	12	2500	1134	5000	2268	
3216	Single/becket swivel	57	5 <sup>1</sup> / <sub>2</sub>	140	5.86	166	1/4	6	7/16	12	2500	1134	5000	2268	
3217	Double swivel	57	5 <sup>3</sup> / <sub>16</sub>	132	11.86	336	5/16	8	7/16	12	3600	1633	7200	3267	
3218	Double/becket swivel	57	6	152	12.43	352	5/16	8	7/16	12	3600	1633	7200	3267	
3227	Stand-up*	57	4 <sup>1</sup> / <sub>2</sub>	114	7.04	200	1/4	6	7/16	12	2500	1134	5000	2268	
3214	Single loop**	57	3	76	3.23	92	—	—	7/16	12	2500	1134	5000	2268	

\*Includes padeye. 6 mm (1/4) fastener circle: 37 mm (1 1/2). \*\*Loop not included. See page 109.