


75 mm Blocks

About Carbo Air blocks: see feature page at beginning of this section.



2661

Saffier Se 33, 9.60 m, Saffier Yachts, Dean Hennevanger design © Bertel Kollthof

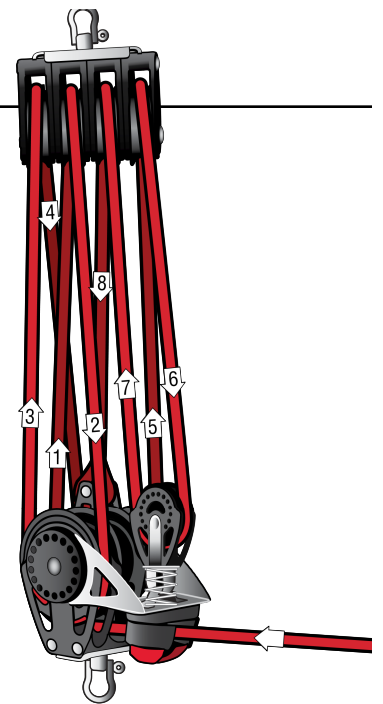

Use with 2687 for a powerful 8:1 purchase.



Part No.	Description	Sheave Ø		Length		Weight w/shackle		Shackle pin Ø		Max line Ø		Maximum working load		Breaking load	
		in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg
2660	Single/swivel	2 ¹⁵ / ₁₆	75	5 ³ / ₈	137	6.9	195	—	6	9 ¹ / ₁₆	14	1213	550	3638	1650
2661	Single/swivel/becket	2 ¹⁵ / ₁₆	75	6 ¹ / ₂	165	7.5	214	—	6	9 ¹ / ₁₆	14	1213	550	3638	1650
2662	Double/swivel	2 ¹⁵ / ₁₆	75	6	152	14.2	402	5 ¹ / ₁₆	8	9 ¹ / ₁₆	14	2426	1100	6000	2722
2663	Double/swivel/becket	2 ¹⁵ / ₁₆	75	7	178	14.8	419	5 ¹ / ₁₆	8	9 ¹ / ₁₆	14	2426	1100	6000	2722
2664	Triple/swivel	2 ¹⁵ / ₁₆	75	6	152	20.5	580	9 ¹ / ₁₆	8	9 ¹ / ₁₆	14	3639	1650	10000	4535
2665	Triple/swivel/becket	2 ¹⁵ / ₁₆	75	7	178	21.1	599	9 ¹ / ₁₆	8	9 ¹ / ₁₆	14	3639	1650	10000	4535
2666	Single/swivel/150 Cam-Matic*	2 ¹⁵ / ₁₆	75	5 ³ / ₈	137	13.4	381	—	6	1/2	12	300	136	750	340
2667	Single/swivel/150 Cam-Matic/becket*	2 ¹⁵ / ₁₆	75	6 ¹ / ₂	165	14	397	—	6	1/2	12	600	272	1500	680
2668	Triple/swivel/150 Cam-Matic*	2 ¹⁵ / ₁₆	75	6	152	27.8	788	9 ¹ / ₁₆	8	1/2	12	1500	680	3750	1700
2669	Triple/swivel/150 Cam-Matic/becket*	2 ¹⁵ / ₁₆	75	7	178	28.4	805	9 ¹ / ₁₆	8	1/2	12	1800	816	4500	2040
2677	Quadruple/swivel	2 ¹⁵ / ₁₆	75	6 ¹ / ₄	159	27.2	772	9 ¹ / ₁₆	8	9 ¹ / ₁₆	14	3639	1650	10000	4535

*Maximum working loads and breaking loads for blocks based on cam strengths.