

Cruising ESP Deck Organizers

Deck organizers lead halyards and control lines aft, allowing crew to sail from the security of the cockpit. They lead a large number of lines through a small space. Harken deck organizers feature ball bearing sheaves and are available in double, triple, and stacked double and triple configurations.

The ESP deck organizer features aluminum hardcoat-anodized sideplates for strength and corrosion resistance.

Mount organizers with large fasteners directly through the sheaves. If you need an additional sheave, use the same holes and simply drill another hole to mount the longer organizer.

Match Cruising ESP mastbase blocks with organizers for a complete system.

6102 is preassembled as a double and shares a common center plate.




Ball bearings handle loads from unfair leads keeping the sheave turning freely.

Aluminum and plastic sleeve bearing for high-static loads




6054
6052

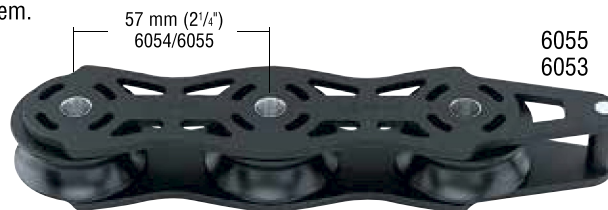

6055
6053



Available in stainless steel 6075 6071

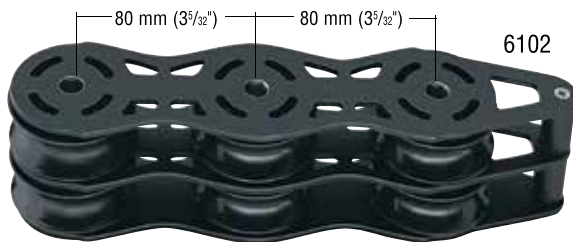

6102



6066
6067



6101



6103
6104

Part No.	Description	Sheave Ø		Length		Weight		Height		Max line Ø		Maximum working load/sheave		Maximum working load*		Breaking load*		Fasteners (RH)	
		in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg	lb	kg	in	mm
6052	Aluminum 2-sheave	2 1/4	57	6 3/4	172	7.5	213	1 1/16	27	5/8	16	2500	1134	4000	1814	8000	3628	3/8	10
6053	Aluminum 3-sheave	2 1/4	57	9 15/16	252	11.5	326	1 1/16	27	5/8	16	2500	1134	6000	2721	12000	5442	3/8	10
6054	Aluminum 2-sheave	1 9/16	40	4 13/16	122	3.5	99	15/16	24	1/2	12	1250	567	2000	907	4000	1814	5/16	8
6055	Aluminum 3-sheave	1 9/16	40	7 11/16	179	5.5	156	15/16	24	1/2	12	1250	567	3000	1361	6000	2721	5/16	8
6066	Aluminum 4-sheave	1 9/16	40	9 5/16	237	7.5	213	15/16	24	1/2	12	1250	567	4000	1814	8000	3628	5/16	8
6067	Aluminum 4-sheave	2 1/4	57	13 1/16	332	15.5	439	1 1/16	27	5/8	16	2500	1134	8000	3628	16000	7256	3/8	10
6071	Stainless steel 3-sheave	2 1/4	57	9 15/16	252	21	595	—	—	5/8	16	2500	1134	6000	2721	12000	5442	3/8	10
6075	Stainless steel 3-sheave	1 9/16	40	7 11/16	179	10	284	—	—	1/2	12	1250	567	3000	1361	6000	2721	5/16	8
6101	Aluminum 5-sheave	2 1/4	57	16 7/32	412	18.4	522	—	—	5/8	16	2500	1134	10000	4535	20000	9070	3/8	10
6102	Aluminum 6-sheave	2 1/4	57	9 15/16	252	20.7	588	2 1/32	52	5/8	16	2500	1134	6000	2721	12000	5442	3/8	10
6103	Aluminum 6-sheave	1 9/16	40	13 3/4	348	11.5	326	15/16	24	1/2	12	1250	567	6000	2721	12000	5442	5/16	8
6104	Aluminum 6-sheave	2 1/4	57	19 9/16	490	21.3	604	1 1/16	27	5/8	16	2500	1134	12000	5442	24000	10884	3/8	10

DO NOT use Harken equipment for human suspension unless product is specifically certified and labeled for such.

*If double stacked, upper block/organizer is two-thirds of listed mwl and breaking load.