

Stainless Steel Shackles

Forged

Stainless steel shackles used on Harken blocks are available separately. Multiple configurations and sizes.

Stamped Shackles

The 072, 138, 246, and 2761 shackles are used on most of the Small Boat blocks. They are also useful for a range of other applications.

Snap Shackles


The 111, 112, and 1584 snap shackles fit a variety of blocks and make them removable. Many use a snap shackle on the lower vang block so that it can be moved from the mastbase to the toerail for use as a preventer.

U-Adaptor

The 093 U-Adaptor allows blocks with 10 mm (3/8") posts to be attached to swivel bases or to other blocks with 10 mm (3/8") posts.

The 1598 U-Adaptor allows blocks with up to 15 mm (19/32") posts to be attached to swivel bases or to other blocks with 15 mm (19/32") posts.

The 463 U-Adaptor adapts 75 mm Carbo singles to swivel bases.

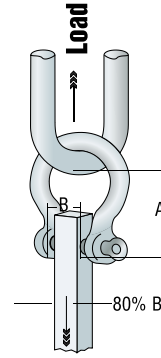


The breaking strengths shown are derived from tests that supported 80% of the length of the screw pin that is unsupported, which is similar to the area of a post in a block. Maximum working loads are no more than half the minimum breaking strength.




Number on shackle denotes screw diameter in millimeters.

High-resistance shackles are marked "HR".

U-Adaptors attach blocks to swivel bases or to other blocks.



Captive Halyard

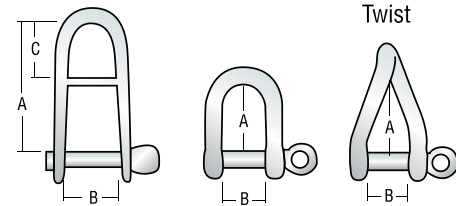


Twist



SNAP SHACKLES



FORGED SHACKLES

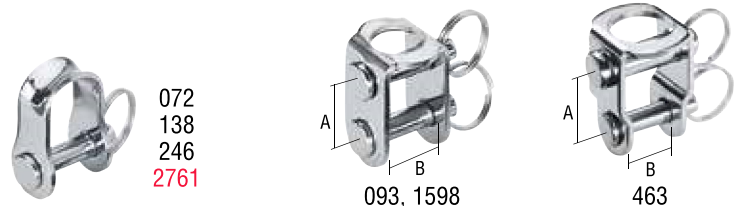

STAMPED SHACKLES

U-ADAPTORS

Stainless Steel Shackles



Beijaflore, Diam 24, 7.25 m (23.8'), ADH Innotec, VPLP © Didier Hillaire

Part No.	Description	Shackle pin Ø		Weight		A		B		C		Maximum working load		Breaking load	
		in	mm	oz	g	in	mm	in	mm	in	mm	lb	kg	lb	kg
Bow															
2103	5 mm	3/16	5	.64	18	1	25	3/8	10	11/16	17	1190	540	2380	1080
2110	6 mm	1/4	6	1.04	29.5	1 1/16	27	9/16	14	3/4	19	1650	750	3300	1500
2117	8 mm	5/16	8	2.48	70.5	1 1/2	38	11/16	17	1 1/8	29	3040	1380	6080	2760
2124	10 mm	13/32	10	4.88	138.5	1 7/8	48	7/8	22	1 1/4	32	4870	2210	9740	4420
Shallow Bow															
2131	4 mm	5/32	4	.3	8.5	5/8	16	5/16	8	7/16	11	810	367	1620	735
2132	5 mm	3/16	5	.51	14.5	11/16	17	7/16	11	9/16	14	1190	540	2380	1080
Forged "D"															
2108	6 mm	1/4	6	.88	25	3/4	19	9/16	14	—	—	1650	750	3300	1500
2115	8 mm	5/16	8	2.08	59	1	25	11/16	17	—	—	3040	1380	6080	2760
2122	10 mm	13/32	10	4.22	120	1 1/4	32	13/16	20	—	—	4870	2210	9740	4420
2126	12 mm	1/2	12	6.70	190	1 1/2	38	15/16	24	—	—	7120	3230	14240	6460
High-Resistance (HR) "D"															
2109	6 mm	1/4	6	.80	22.5	3/4	19	9/16	14	—	—	2770	1260	5540	2510
2116	8 mm	5/16	8	2	56.5	1	25	5/8	16	—	—	5130	2330	10260	4650
2123	10 mm	13/32	10	3.92	111	1 1/4	32	13/16	20	—	—	8210	3720	16420	7450
2127	12 mm	1/2	12	6.8	193	1 3/4	44	1	25	—	—	12000	5440	24000	10880
Long															
2104	5 mm	3/16	5	.78	22	1 1/2	38	3/8	10	—	—	1190	540	2380	1080
2111	6 mm	1/4	6	1.34	38	1 3/4	44	1/2	13	—	—	1650	750	3300	1500
2118	8 mm	5/16	8	3.01	85.5	2 1/4	57	5/8	16	—	—	3040	1380	6080	2760
Twist															
2105	5 mm	3/16	5	.78	22	1 1/16	37	3/8	10	—	—	1190	540	2380	1080
2112	6 mm	1/4	6	1.12	32	1 1/8	29	1/2	12	—	—	1650	750	3300	1500
2119	8 mm	5/16	8	1.84	52	1 5/8	41	11/16	17	—	—	3040	1380	6080	2760
2125	10 mm	13/32	10	4.96	140.5	1 7/8	48	3/4	19	—	—	4870	2210	9740	4420
Large Open															
2106	5 mm	3/16	5	.88	25	1 5/16	33	13/16	20	—	—	770	350	2200	1000
Captive Halyard															
2107	5 mm	3/16	5	1.12	32	1 5/8	35	9/16	14	3/16	14	1190	540	2380	1080
Stamped Shackles															
072	Small	3/16	5	.29	8	1/2	12	7/16	11	—	—	1250	567	2500	1134
138	Large	1/4	6	.54	15.5	11/16	17	5/8	16	—	—	1500	680	3000	1360
246	Micro	5/32	4	.18	5	7/16	11	3/8	9	—	—	600	270	1200	545
2761	Medium	1/4	6	.45	12.7	5/8	15	9/16	14	—	—	1500	680	3000	1361
Snap Shackles															
111	Snap shackle	3/16	5	3	85	2 5/16	65	—	—	—	—	1000	454	2000	907
112	Large snap shackle	1/4	6	4.5	128	3 3/8	86	—	—	—	—	1500	680	3000	1361
1584	Midrange snap shackle	5/16	8	4	113	3 1/16	78	—	—	—	—	1800	816	3600	1633
U-Adaptors															
093	U-Adaptor	3/16	5	.48	13.6	1/2	12	7/16	11	—	—	1250	567	2500	1134
463	U-Adaptor	3/16/1/4	5/6	.58	16.3	9/16	14	13/32	10	—	—	1250	567	2500	1134
1598	Midrange U-Adaptor	5/16	8	1.57	44.4	1/2	12	7/8	22	—	—	1800	817	3600	1633

DO NOT use Harken equipment for human suspension unless product is specifically certified and labeled for such use.