


Stainless Steel Cruising ESP Blocks

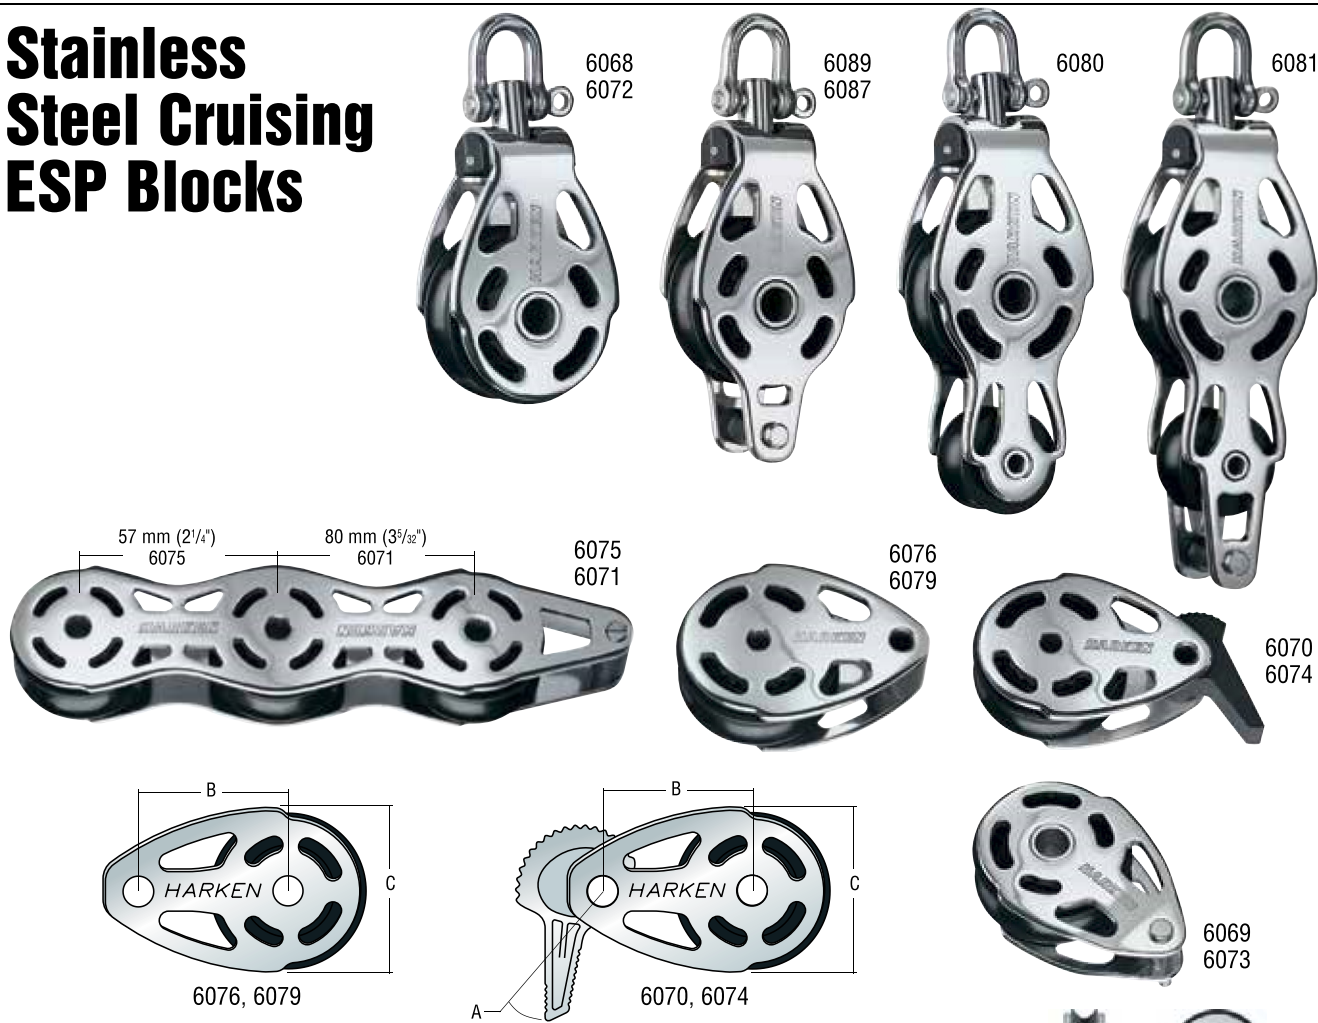

Dimensions

Part No.	A		B		C	
	in	mm	in	mm	in	mm
6070	1 ³¹ / ₃₂	50	2 ⁵ / ₃₂	55	2 ¹ / ₄	57
6074	2	51	2 ¹ / ₂	63	2 ²⁹ / ₃₂	74
6076	—	—	2 ⁵ / ₃₂	55	2 ¹ / ₄	57
6079	—	—	2 ¹ / ₂	63	2 ³¹ / ₃₂	75

14 mm (6069, 6073)
Post not included

Part No.	Description	Sheave Ø		Length		Weight	Clevis/shackle pin Ø		Max line Ø		Maximum working load		Breaking load‡		Max lockoff load		Fasteners (FH)		
		in	mm	in	mm		in	mm	in	mm	lb	kg	lb	kg	in	mm			
57 mm																			
6068	Single/swivel	2 ¹ / ₄	57	5 ¹ / ₂	140	11	312	5/16	8	5/8	16	2205	1000	4409	2000	—	—	—	
6069	Teardrop mast collar	2 ¹ / ₄	57	3 ¹¹ / ₁₆	93.5	7	198	5/16	8	5/8	16	2205	1000	4409	2000	—	—	—	
6070	Single foot/lockoff* ‡	2 ¹ / ₄	57	3 ³ / ₄	132	9	255	—	—	5/8	16	2205	1000	4409	2000	650	295	3/8	10
6076	Footblock* ‡	2 ¹ / ₄	57	3 ³ / ₄	95	7	198	—	—	5/8	16	2205	1000	4409	2000	—	—	3/8	10
6089	Single/swivel/becket	2 ¹ / ₄	57	6 ¹¹ / ₁₆	170	12.5	354	5/16	8	5/8	16	2205	1000	4409	2000	—	—	—	
75 mm																			
6072	Single/swivel	3	75	6 ¹ / ₄	159	19	539	5/16	8	3/4	19	3500	1587	7000	3175	—	—	—	
6073	Teardrop mast collar	3	75	4 ⁵ / ₈	117	16	454	5/16	8	3/4	19	3000	1361	6000	2721	—	—	—	
6074	Single foot/lockoff* ‡	3	75	4 ³ / ₈	111	17	482	—	—	3/4	19	3500	1587	7000	3175	750	340	3/8	10
6079	Footblock* ‡	3	75	4 ¹ / ₂	114	16	454	—	—	3/4	19	3500	1587	7000	3175	—	—	3/8	10
6080	Fiddle	3 ¹ / ₁₆	75/46	8 ³ / ₈	213	24	680	5/16	8	3/4	19	3500	1587	7000	3175	—	—	—	
6081	Fiddle/becket	3 ¹ / ₁₆	75/46	9 ¹ / ₂	241	26.25	744	5/16	8	3/4	19	3500	1587	7000	3175	—	—	—	
6087	Single/swivel/becket	3	75	7 ¹ / ₄	184	21.25	602	5/16	8	3/4	19	3500	1587	7000	3175	—	—	—	
Deck Organizers																			
6075	Deck organizer/3-sheave‡	1 ¹ / ₂	40	7 ¹¹ / ₁₆	179	10	284	—	—	1/2	12	3000	1361	6000	2721	—	—	5/16	8
6071	Deck organizer/3-sheave‡	2 ¹ / ₄	57	9 ⁵ / ₁₆	252	21	595	—	—	5/8	16	6000	2721	12000	5442	—	—	3/8	10

*Lockoffs are intended to hold lines temporarily and should not be used in place of line stoppers or clutches. **Refer to page 86 for 6076/6079 hole spacing.
‡If double stacked, upper block/organizer is two-thirds of listed mwl and breaking load.